



FAISALABAD INDUSTRIAL ESTATE DEVELOPMENT & MANAGEMENT COMPANY

Office of Chief Executive Officer, FIEDMC
1st Floor, FCCI Complex, East Canal Road Canal Road, Faisalabad
Tel: (041) 9230231-4 Fax: (041) 9230235

GALLOP TENDER NOTICE

1. **FAISALABAD INDUSTRIAL ESTATE DEVELOPMENT & MANAGEMENT COMPANY, FAISALABAD**, invites sealed Gallop Tenders from eligible firms licensed by the Pakistan Engineering Council for the following work:

S. Nr.	Name of Work	PEC Category & Code
1.	Making of two numbers of U-Turn type openings at Main Arterial Road of M-3 Industrial City, Near Sahianwala Interchange M-3 Motorway, Faisalabad.	PEC Category C-4 & above with code CE-10

2. Following may be the scope of Works with the tentative quantities:

Sr. No.	Particulars	Qty	Unit	Rate (Rs.)	Amount (Rs.)
1	Dismantling of Structures and Obstructions (Item No. 510 of NHA Specifications)	7,500	CFT		
2	Compaction of Natural Ground (Item No. 104 of NHA Specifications)	3,000	SFT		
3	Formation of Embankment from Roadway Excavation in Common Material (Item NO. 108a of NHA Specifications)	1,600	CFT		
4	Formation of Embankment from Borrow Excavation in Common Material (Item NO. 108c of NHA Specifications)	1,600	CFT		
5	Granular Sub-base (Item No. 201 of NHA Specifications)	3,200	CFT		
6	Aggregate Base (Item No. 202 of NHA Specifications)	2,500	CFT		
7	Bituminous Prime Coat (Item No. 302 of NHA Specifications)	3,000	SFT		
8	Bituminous Tack Coat (Item No. 303 of NHA Specifications)	6,000	SFT		
9	Asphaltic Base Course Plant Mix Class A (Item No. 203a of NHA Specifications)	1,400	CFT		
10	Asphalt Concrete for Wearing Course (Class A) (Item No. 305a of NHA Specifications)	300	CFT		
11	Concrete Kerb as per Item No. 601a of NHA Specifications. This will include excavation, concrete etc. as shown in the drawings. Payment shall be made per running feet of the item. Section of the kerb block shall be as per the drawing.	100	FT		
12	Providing uPVC pipe 6" dia opening for storm water including cost of laying, concreting etc. complete in all respect as directed by the Consultant	10	FT		
13	Providing uPVC pipe 2" or 3" as per the Site conditions, for the electric cable including laying, concreting etc. complete in all respect as directed by the Consultant	150	FT		

CFT stands for Cubic Foot

SFT stands for Square Foot

FT stands for running Foot


3. Bidders may obtain further information from the Office of the Chief Executive Office, FIEDMC, 1st Floor, FCCI Complex, East Canal Road, Canal Park, Faisalabad.
4. All bids must be accompanied by a Bid Security in the amount of not less than 5% **(FIVE Percent) of Bid Amount** and must be delivered to Office of the Chief Executive

Officer, FIEDMC, 1st Floor, FCCI Complex, East Canal Road, Canal Park, Faisalabad, at or before **1500** hours, on 09.03.2015.


5. Any bid received by the Employer after the deadline for submission of bids will be returned unopened.
6. Any bid not accompanied by an acceptable Bid Security shall be rejected by the Employer as non-responsive.
7. Bids will be opened at 1530 hours on the same day, in the presence of bidder's representatives who choose to attend at the same address.
8. FIEDMC may reject all or any bids subject to relevant provision of Punjab Procurement Rules 2014 (PPR-2014).
9. Bids/ tenders with any conditions shall be rejected.
10. Time for Completion of Work shall be one month from the date of receipt of Letter of Acceptance, which shall be issued to lowest evaluated bidder after the evaluation of bids.
11. Bid Security furnished by the lowest evaluated bidder shall be treated as Performance Security and shall be returned after the issuance of Completion Certificate, which shall be issued within 07 days from the date of Taking Over of the Works. Bid Security of the unsuccessful bidders shall be returned after the evaluation of bids.
12. All Works shall be supervised by the Consultant, M/S Osmani & Company.
13. Payment shall be made as per the amounts certified by the Chief Resident Engineer, subsequent to the submission of bill by the Contractor.
14. Site will be handed over to the Contractor at the issuance of Letter of Acceptance.
15. All Works shall be as per General Specifications (Latest Edition) of National Highway Authority. PPRA-2014 and Standard Form of Bidding Documents for Procurement of Works (For Smaller Contracts) of Pakistan Engineering Council shall apply; these are available at

<http://ppra.punjab.gov.pk/downloads>
<http://www.pec.org.pk/Downloads.aspx#biddocs>


Chief Executive Officer
Faisalabad Industrial Estate Development
& Management Company

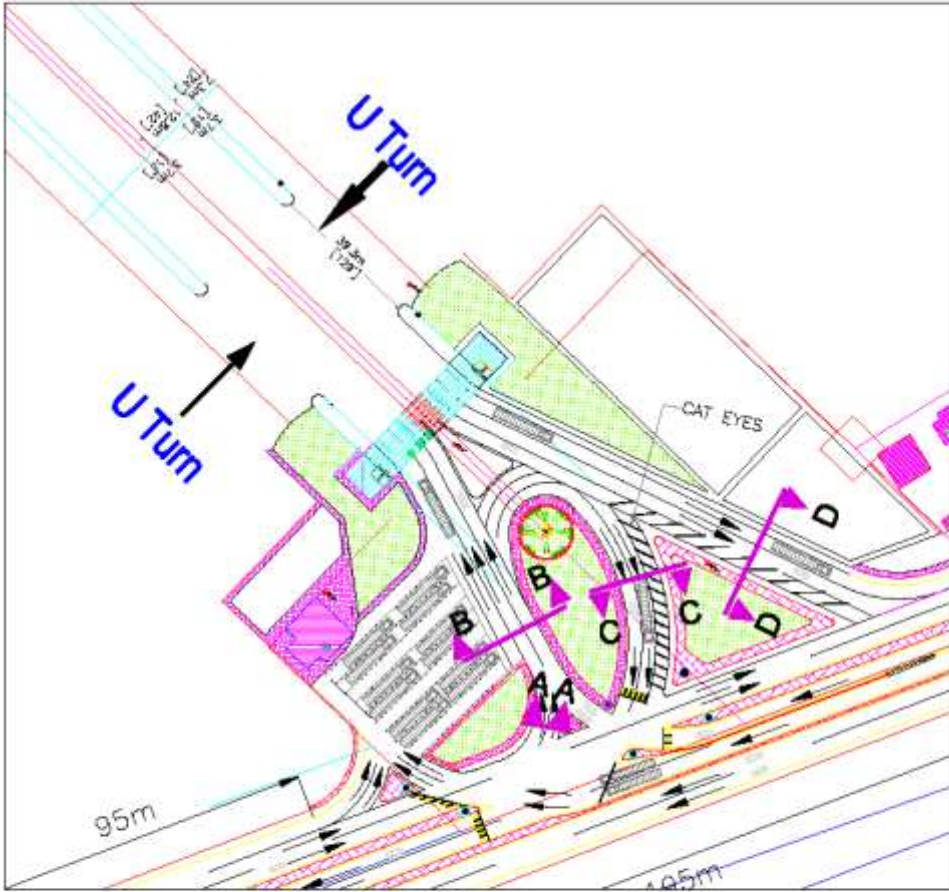



CONSTRUCTION OF MAIN ARTERIAL ROAD M3 – INDUSTRIAL CITY, FAISALABAD

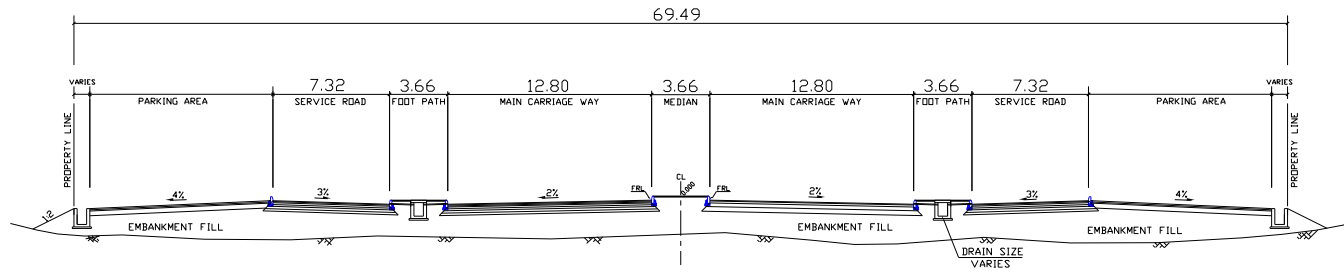


TYPICAL X-SECTION



DETAIL OF KERB STONE

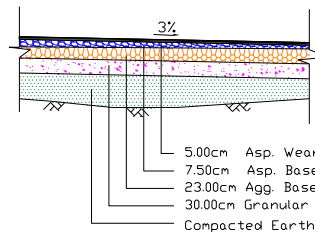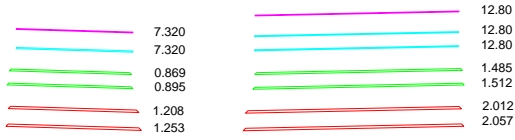

**SECTION B-B
PAVEMENT DETAIL FOR SERVICE ROAD**

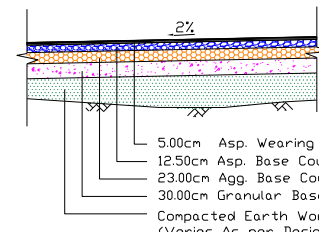

**SECTION A-A
PAVEMENT DETAIL FOR MAIN CARRIAGEWAY**

Description	Maincarriageway		TOTAL
	LCW (MCW)	RCW (MCW)	
Asphaltic Wearing Course	12.80	12.80	25.60 M
Asphaltic Base Course 2nd Layer	12.80	12.80	25.60 M
Asphaltic Base Course 1st Layer	12.80	12.80	25.60 M
Agg. Base Course 2nd Layer	1.485	1.485	2.970 M ²
Agg. Base Course 1st Layer	1.512	1.512	3.024 M ²
Sub Base Course 2nd Layer	2.012	2.012	4.024 M ²
Sub Base Course 1st Layer	2.057	2.057	4.114 M ²

Description	Service Road		TOTAL
	LCW (SR)	RCW (SR)	
Asphaltic Wearing Course	7.320	7.320	14.64 M
Asphaltic Base Course 2nd Layer	-	-	-
Asphaltic Base Course 1st Layer	7.320	7.320	14.64 M
Agg. Base Course 2nd Layer	0.869	0.869	1.738 M ²
Agg. Base Course 1st Layer	0.895	0.895	1.790 M ²
Sub Base Course 2nd Layer	1.208	1.208	2.416 M ²
Sub Base Course 1st Layer	1.253	1.253	2.506 M ²

CLIENT:—



FIEDMC

FAISALABAD INDUSTRIAL ESTATE
DEVELOPMENT & MANAGEMENT COMPANY

CONSULTANTS:—



OSMANI & COMPANY (PVT.) LTD.
CONSULTANT ENGINEERS—ARCHITECTS—PLANNER
OFFICE HOUSE 242/25, BLOCK 6 P.E.C.S. PHASE 10/40, RAJASTHAN
MODEL - 030-2412680071-0412680011-112, P.O. - 030-2412680011
E-MAIL: osmani@osmani.com

PROJECT:—

CONSTRUCTION OF MAIN ARTERIAL ROAD
M3 - INDUSTRIAL CITY, FAISALABAD

TITLE:—

**ROAD X-SECTION
CONSTRUCTION DRAWING**
KM 01+350 — KM 06+300 (FIC-001)
KM 06+300 — KM 12+450 (FIC-002)

ED. NO.	DATE	DESCRIPTION	PREPARED BY:	SCALE:
				HDR=1:100 VER=1:100
			CHECKED BY:	DRAWING NO:
			APPROVED BY:	DATE:
				Edition:

